

TRSK-36A



Products Features


- Good structure stability with buckle
- Various window size
- Strong anti-saturataion ability
- Provide a variety of combined output methods
- Good linearity and high sensitive level

Application


- Online enviromental monitoring
- Smart fire-fighting power consumption
- Low voltage power distribution system
- Power quality analysis and eletrical equipment collection
- Electricity measurement

Mechanical dimension


Dimension (mm)

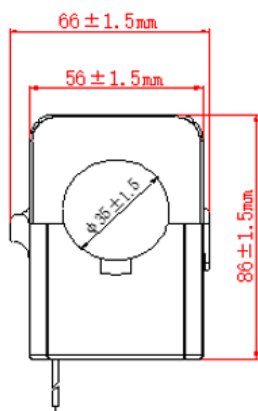


Front View

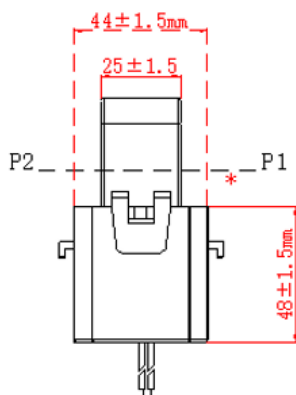

Side View




Bottom View



Mechanical characteristics

Aperture $\Phi 35\text{mm}$

Electrical schematic diagram

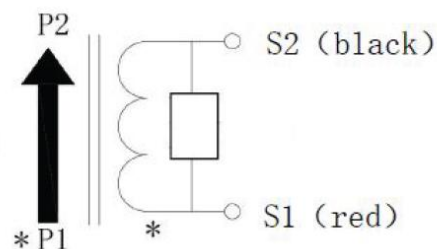



Technical data

Transformation ratio	200A/1A	200A/5A	250A/1A	300A/1A	400A/5A
Accuracy class	1.0	1.0	1.0	1.0	0.5
Rated capacity	0.2VA	0.2VA	0.2VA	0.2VA	2.5VA
Lead wire	6±0.05m	4±0.05m	6±0.05m	6±0.05m	6±0.05m
Weight	Around 310g	Around 340g	Around 320g	Around 350g	Around 460g
Overload	1.2 times				
Frequency	50Hz/60Hz				
Inner diameter	Φ35mm				
Tolerance	±1.5mm				
Power frequency withstand voltage	3kV AC/1min				
Ambient operating temperature	-25°C~+70°C	-25°C~+70°C	-25°C~+70°C	-25°C~+70°C	-25°C~+75°C
Ambient storage temperature	-40°C~+75°C	-40°C~+75°C	-40°C~+75°C	-40°C~+75°C	-40°C~+85°C

Contact information

HUBEI TIANRUI ELECTRONIC CO.,LTD.

Add: No.8 Chuangye Road, Econommic Development Zone, Tianmen 431700, Hubei, China

Website: www.hbtrec.com

Email: export@hbtianrui.com